
100TDiS Linear threshold Drainage System







- * The entire door track and 100TDiS are set in above and separate to waterproofing. Therefore waterproofing must be completed first.
- * The included sill tray must be installed first as the door tracks are installed into tray of the 100TDiS.

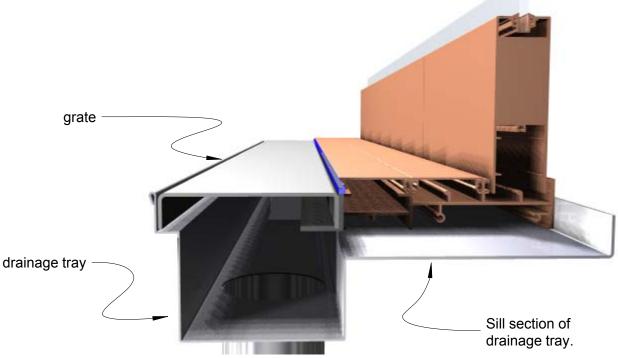