




# 65TiG25

## Tile Insert Drain



## Steel Grade 316

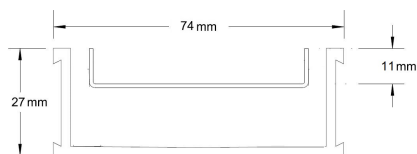


The 65TiG25 is a modular drainage system with a stainless steel tile insert and uPVC channel.

Suitable for tiles up to 10mm thick.

## SPECIFICATIONS + DIMENSIONS

<b>Channel Width</b>	74mm			
<b>Channel Depth</b>	27mm			
<b>Length(s)</b>	900mm	1000mm	1200mm	1500mm
	1800mm	2000mm	1900mm	2200mm
	2400mm	2700mm	3000mm	
<b>Outlet Size</b>	DN40, DN50			

## STORMTECH COLOUR FINISHES



**Electroplate finishes subject to natural variation with time and local environment. Factors such as pools/surf beaches may require electropolishing. Contact us for suitability.**

## PRODUCT APPLICATIONS

Bathroom Drainage  
Aged / Health Care Drainage  
Balcony Drainage  
Commercial Drainage  
Courtyard / Patio Drainage  
Pool and Spa Area Drainage

Hospitality Drainage  
Paved Area Drainage  
Shower Drainage  
Multi-Residential Drainage  
Special Needs Drainage  
Threshold Drainage

Copyright © Stormtech Pty Ltd. Patent 733361. Drawings not to scale, please use dimensions shown.  
Downloaded 29/04/2024 (please check for updates)



Visit **stormtech.com.au**  
for tools + inspiration.

Phone **1300 653 403**

Email **info@stormtech.com.au**