



# 38DG CONCRETE FLOOR/DECK



## Standard installation



### Slab on ground.

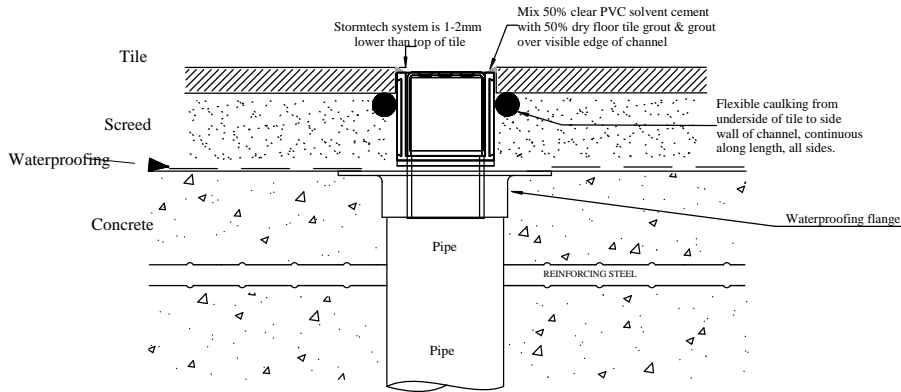

### Suspended Slab

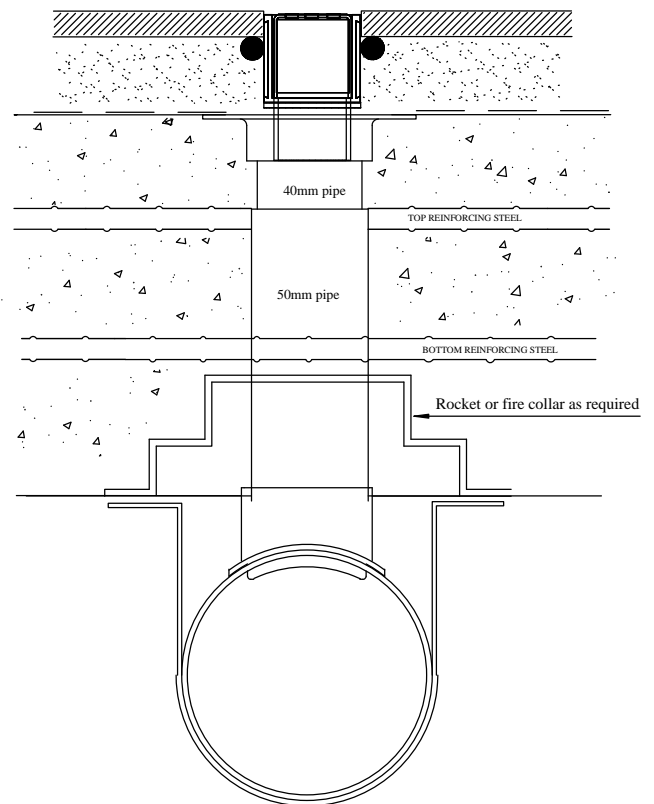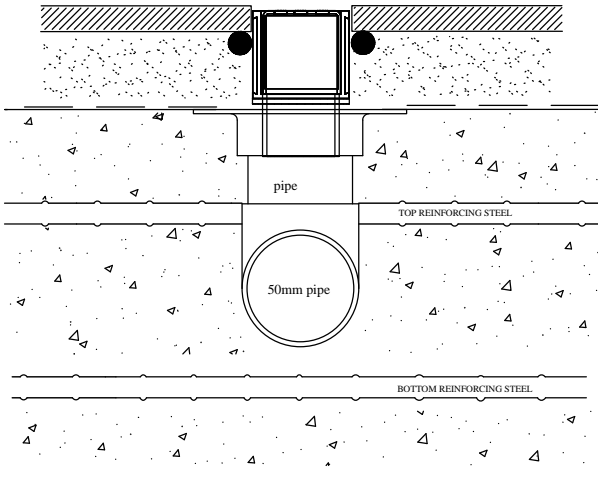

An F32 spigot fits in a 40 DWV pipe and should drain 0.5 L/s..... We recommend these Spigots every 1m, not more than 0.5m from end.  
The loose fitting Spigots provide an outlet for moisture in the waterproof rebate and allows the Channel to be removed for safe keeping until tiling.