




GAME CHANGING FLEXIBILITY



# GAME CHANGING FLEXIBILITY

## FlexiFlange

- Gauge lines on upper for easy measurement and trimming
- Removable riser plug prevents debris blocking drain
- Integral flood test level gauge
- Easily flex to conform to other surfaces such as wall and floor
- Dry film thickness gauges of 1 and 2 mm to assist waterproofing Large diameter for extra variability
- Labyrinth seal prevents backflow
- Ultra thin profile

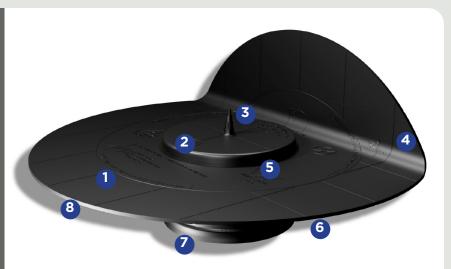



### Highly versatile, widely compatible


Compatible with DN100 pipe, and all PVC, sheet and liquid waterproofing membranes (excluding bitumen)

#### **Don't Compromise Position**

drainage with a flange that conforms to

### **Product Facts**

Product Code	100Flex
Overall Diameter	300mm
Depth	60mm
Flange Thickness	≈2mm
Compatible With	DN100 pipe, All Stormtech drainage outlets
Compliant With	Watermark WMTS-040, NCC Parts 1&2 2022, Housing Provisions, AS3740, AS3500.2, AS4654.1
Certifications	Watermark, ISO9001, Best Environmental Practice PVC









www.stormtech.com.au | info@stormtech.com.au | 1300 653 403